



KULLANMA KILAVUZU



RS-SQL SERİSİ 38/46 CM SUBWOOFER

Lütfen kullanma kılavuzunu dikkatlice okumadan cihazınızı kullanmayınız.

Değerli Müşterimiz,

Öncelikle kalitenin öncüsü olan **REISS AUDIO** markalı cihazımızı tercih ettiğiniz için teşekkür ederiz.

Modern tesislerde üretilen ve titiz kalite kontrolünden geçirilmiş olan cihazınızın size en iyi verimi sunabilmesi için, **bu kılavuzun tamamını cihazınızı kullanmadan önce dikkatle okumanızı ve bir başvuru kaynağı olarak saklamanızı rica ederiz.**

www.reissaudio.com.tr

RS-SQL15.D2/D4 15" CAR SUB



RS-SQL18.D2/D4 18" CAR SUB

Features:

Solid massive die cast basket;
Kevlar fiber enhanced paper cone
Red stitched R-flex foam surround;
3" 4-layer round copper wire voice coil;
Black polycotton 4-pc spiders;
Triple stacked 225oz Strontium magnets;
10 gauge power cable direct connecting;
Rubber magnet boot and rubber gasket;
DVC 2-ohm or DVC 4-ohm Impedance;
1500W RMS power and 3000W MAX power

RS-SQL series subwoofers dimintions

Dimensions	Value	RS-SQL15.D2/D4	RS-SQL18.D2/D4
Diameter A	mm	395	470
Diameter B	mm	375	442
Diameter C	mm	350	422
Diameter D	mm	196	196
Depth E	mm	89	89
Depth F	mm	18	18
Depth G	mm	201	238
Depth H	mm	238	278
Vd	L	7.2	11.0

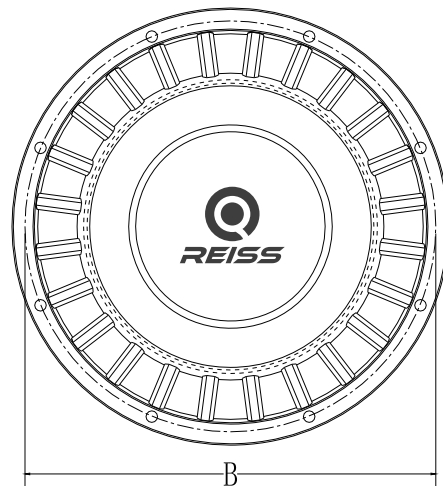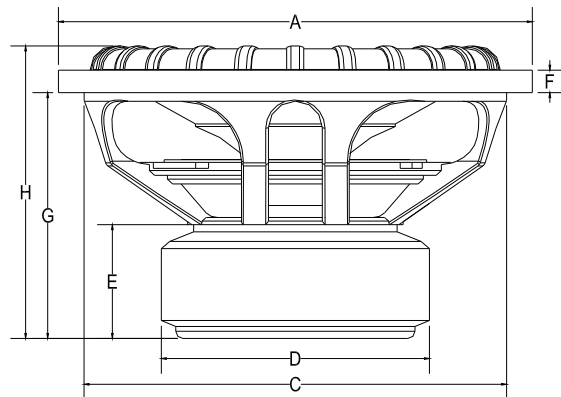

RS-SQL series subwoofer T/S Parameters

	Imp	Dcr	Fs	SD	BL	Qms	Qes	Qts	n	SPLo	Vas	Cms	Mms	Mmd	Xmax	Xmech	AGH
MODEL	ohm	ohm	Hz	msqM	Tm					dB	L	µm/N	g	g	±mm	mm	mm
RS-SQL15.D2	1	0.9	32.9	80.4	12.29	4.700	0.472	0.429	0.409	88.1	56.1	61.0	383.3	370.2	15.5	40	14
RS-SQL15.D2	4	3.8	32.3	80.4	26.52	4.253	0.452	0.408	0.39	87.9	54.2	59.0	412.0	398.9	15.5	40	14
RS-SQL15.D4	2	1.7	34.5	80.4	14.98	4.608	0.534	0.478	0.447	88.5	60.3	65.6	325.2	312.1	15.5	40	14
RS-SQL15.D4	8	6.8	34.2	80.4	34.3	4.356	0.503	0.451	0.467	88.3	59.1	63.4	330.4	327.3	15.5	40	14
RS-SQL18.D2	1	0.9	31.3	113.4	12.01	5.034	0.572	0.514	0.514	89.2	101.3	55.5	467.0	445.0	15.5	40	14
RS-SQL18.D2	4	3.8	31.0	113.4	26.47	4.337	0.512	0.458	0.558	89.5	99.3	54.4	485.1	363.1	15.5	40	14
RS-SQL18.D4	2	1.7	32.0	113.4	14.69	4.820	0.678	0.594	0.492	88.9	105.7	57.9	428.8	406.8	15.5	40	14
RS-SQL18.D4	8	6.8	31.8	113.4	30.32	4.636	0.643	0.565	0.509	89.1	105.0	57.5	434.8	412.9	15.5	40	14

*Above parameters are tested after each subwoofer was break-in-ed with 55V 50Hz input with 2ohm load (DVC4 version) and 80V 50Hz input with 4ohm load (DVC2 version) for 8 hours.

*AGH: Air Gap Height.

*Due to continuous pursuit of performance, specifications change without prior notice.



**KULLANMA
KILAVUZU**



RS-SQL SERİSİ

38/46 CM SUBWOOFER

İTHALATÇI FİRMA & SERVİS BİLGİLERİ

REİS ELEKTRONİK SANAYİ VE TİCARET A.Ş

Mahmutbey Mah. Küçük Halkalı Cad.No:9 Bağcılar-İstanbul

Tel:0212-447 02 02 - 659 07 22

www.reissaudio.com.tr