



REISS AUDIO
KULLANMA KILAVUZU

Models: RS-PX1200.1D/RS-PX2500.1D/RS-PX400.2D/RS-PX600.2D/RS-PX200.4D/RS-PX300.4D/RS-PX400.4D/RS-PX600.4D/RS-PX1300.5D/RS-PX1600.5D/RS-PX150.6D/RS-PX200.6D

Lütfen kullanma kılavuzunu dikkatlice okumadan cihazınızı kullanmayınız.

Değerli Müşterimiz,
Öncelikle kalitenin öncüsü olan REISS AUDIO markalı cihazımızı tercih ettiğiniz için teşekkür ederiz.
Modern tesislerde üretilen ve titiz kalite kontrollerinden geçirilmiş olan cihazınızın size en iyi verimi sunabilmesi için, bu kılavuzun tamamını cihazınızı kullanmadan önce dikkatle okumanızı ve bir basuryu taşıması olarak saklamanızı rica ederiz.

www.reissaudio.com.tr

AMPLIFIER OWNER'S MANUAL

WHERE YOU HEADED?
Thank you for choosing REISS AUDIO/RS-PX amp! Your choice of REISS AUDIO/RS-PX amp indicates a desire for high quality music reproduction in the automobile. REISS AUDIO/RS-PX amp brings to you over four decades of car audio expertise. So whether you are a daily driving music lover, or a serious car audio competitor, REISS AUDIO/RS-PX amp gear you have just purchased, please read and follow the instructions in this manual. As with all of our products, professional installation by an authorized REISS AUDIO/RS-PX amp dealer is highly recommended! Otherwise, the performance of your new gear may not be satisfactory. In addition to the installation services and expertise offered by an authorized REISS AUDIO/RS-PX amp dealer, the warranty of this product may be extended when installed by an authorized REISS AUDIO/RS-PX amp dealer. Be sure to ask your authorized REISS AUDIO/RS-PX amp dealer about whether your product may qualify for an extended warranty.

INTRODUCTION
The REISS AUDIO/RS-PX amplifiers offer high quality audio reproduction for the audiophile and the everyday listener alike. All models feature fully variable crossovers with 12 dB per octave slopes, allowing you the ability to tailor the sound to best fit the speakers and your listening preferences.

Platinum Tera connections - Ensures solid electrical connections that resist corrosion.

Fully Variable Crossovers - Fully variable crossovers promote installation ease and save the cost of outboard crossovers. Additionally, they may be used in conjunction with outboard passive or active crossovers, depending on the complexity required by the system. The 12 dB per octave slope offers steep roll-off above or below the selected frequency.

Protection Circuitry - Against Overload, Short Circuit, Thermal, Low Voltage, High Voltage, and Reverse Polarity. These Protection Features are designed to protect the amplifier from misuse, as well as from common causes of amplifier failure.

INSTALLATION
Professional installation by an authorized REISS AUDIO/RS-PX amp dealer is highly recommended! Otherwise, the performance of your new gear may not be satisfactory. In the event that you decide to do your own installation, please read and follow this manual very carefully. Failure to do so may compromise the integrity of this product, your automobile, and possibly void the product warranty.

Amplifiers are generally mounted in the hatch/trunk area of a car or SUV, and under or behind the seat of most pickup trucks. Select a location that will provide adequate ventilation for the amplifier. Avoid mounting the amplifier with the fins facing down. The fins should be facing up, either vertically or horizontally. Secure the amplifier with the screws provided.

INPUT CONFIGURATION
Before securing the amplifier, inspect the mounting location carefully to ensure that you do not drill into or damage any electrical, hydraulic, fluid, or fuel lines.

Input Section
Because of the wide range of head unit output configurations all REISS AUDIO/RS-PX amps have an adjustable input sensitivity of "Gain". The gain is not a volume or a power limiting control like a strobe. It makes the amp more sensitive to input from the stereo, with the gain up the amp will reach full output at a lower volume setting on the deck. At higher gain settings the amp also becomes more sensitive to noise from the car's electrical system. Try to run the gain at the lowest setting possible for your system.

There is no correct gain setting. Because speakers require different power demands to reach the same output, the gains most often need to be used to compensate for these differences. If you tried to set all the gains at half way you would probably find the system didn't sound very good. Using good judgment and listening carefully to each speaker is still the best way to tune a system.

AMPLIFIER OWNER'S MANUAL

CROSSOVER CONTROLS
A crossover is a device that removes unwanted frequencies from a speaker or amplifier. A tweeter can easily be destroyed by bass notes if they are not filtered out. Likewise a subwoofer will not sound natural if it is playing midrange notes. A crossover removes these sounds from the speaker. As you might guess, careful adjustment is needed to ensure that all the speakers are playing the right sounds and that you are left with no "holes" or low spots in the frequency response.

SPEAKER OUTPUTS
This amplifier is a multi channel amplifier design. Meaning it has more than one channel of speaker outputs. It is equipped with a large block style terminal for speaker connection. Make this connection carefully and neatly. Strip your wire back and twist the exposed leads and insert them into the block terminal while being careful that there is no loose or frayed strands of wire and tighten the Allen head screw down on the terminal till the wire is tightly secured in place.

If the wires ever come in contact with each other the amplifier will go into protection.

BASS BOOST AND CONT
REISS AUDIO/RS-PX1200.1D/RS-PX2500.1D/RS-PX400.2D/RS-PX600.2D/SUB CH/RS-PX1300.5D & RS-PX1800.5D amplifiers have an adjustable bass boost which controlled by a VR selecting the most commonly used BASS BOOST setting. Begin your adjustments at low volume. If you do not hear any improvement then woofers does not need any BASS BOOST.













The Low Pass Filter (LPF) must be switched on for the bass boost to activate. Begin your adjustments at low volume. Turn the Bass Boost Level control about 1/2 way up. Next, turn the Bass Boost Frequency up and down. This will take some tweaking but try to find the setting that gives you a richer and fuller sound without over working the subwoofer. Play several different kinds of music to test your adjustment. You may find you have to go back and make some changes and compromises to get it sounding right with an assortment of music. Use Bass Boost carefully. The demands on power output are tremendous. Try to minimize the use by changing woofer position on the enclosure size.

INSTALLATION INSTRUCTIONS

- Before you start, disconnect the negative cable from the car battery. Tape up the end so it is isolated from the battery.
- Run an appropriate gauge wire from the battery to the amplifier. Plan this part of the installation carefully. This cable will carry very high current. If it should short to the body and it is not properly fused it could catch fire.
- Connect the power wire to the battery using a fuse capable of the total current load of all amplifiers connected. Don't install the fuse yet. Wait until the end, locate the fuse as close as possible to the battery. If the fuse is further than 18 inches/wire length from the battery you should reevaluate the wire and fuse placement.

AMPLIFIER OWNER'S MANUAL

- Find the closest clean metal area to the amp for a ground, sand, grind or scrape all paint and undercoating from the body and screw the ground securely in place.
- It is advisable to test the ground with an ohmmeter between the ground cable and the negative battery cable to insure a good low resistance connection. Some alloys used in modern cars do not offer the best ground. If you believe this is the case consult with the vehicle manufacturer.
- Run the speaker wire to the speakers. It is advised that you have some extra wire at this point. You can clean it up later.
- If you haven't already done so mount the amp now.
- Connect the power and ground to the amplifier.
- Only after this step should you install the fuse at the battery.
- Connect the remote wire from the head unit to the amplifier. Now is a good time to turn on the amp for the first time. Make sure it turns on properly and does not go into protection.
- Connect the speaker wire to the amp and speakers (make sure the amp is off first). Make sure the polarity is +&- is correct.
- Connect the RCA's to the amp.
- Double check the amplifier controls at this time. Make sure everything is set correctly for your system.
- Now you're ready to play it for the first time. It is best to leave the gain all the way down at first. Start with the head unit volume low and work your way up.
- Now you can tune the amp. Take your time and make only one adjustment at a time. It may take some time to get the system fully adjusted. During this time the amp is drawing current from the battery. You should check the battery voltage from time to time and re-charge it if it gets low, that's it. You're done. Now have fun.

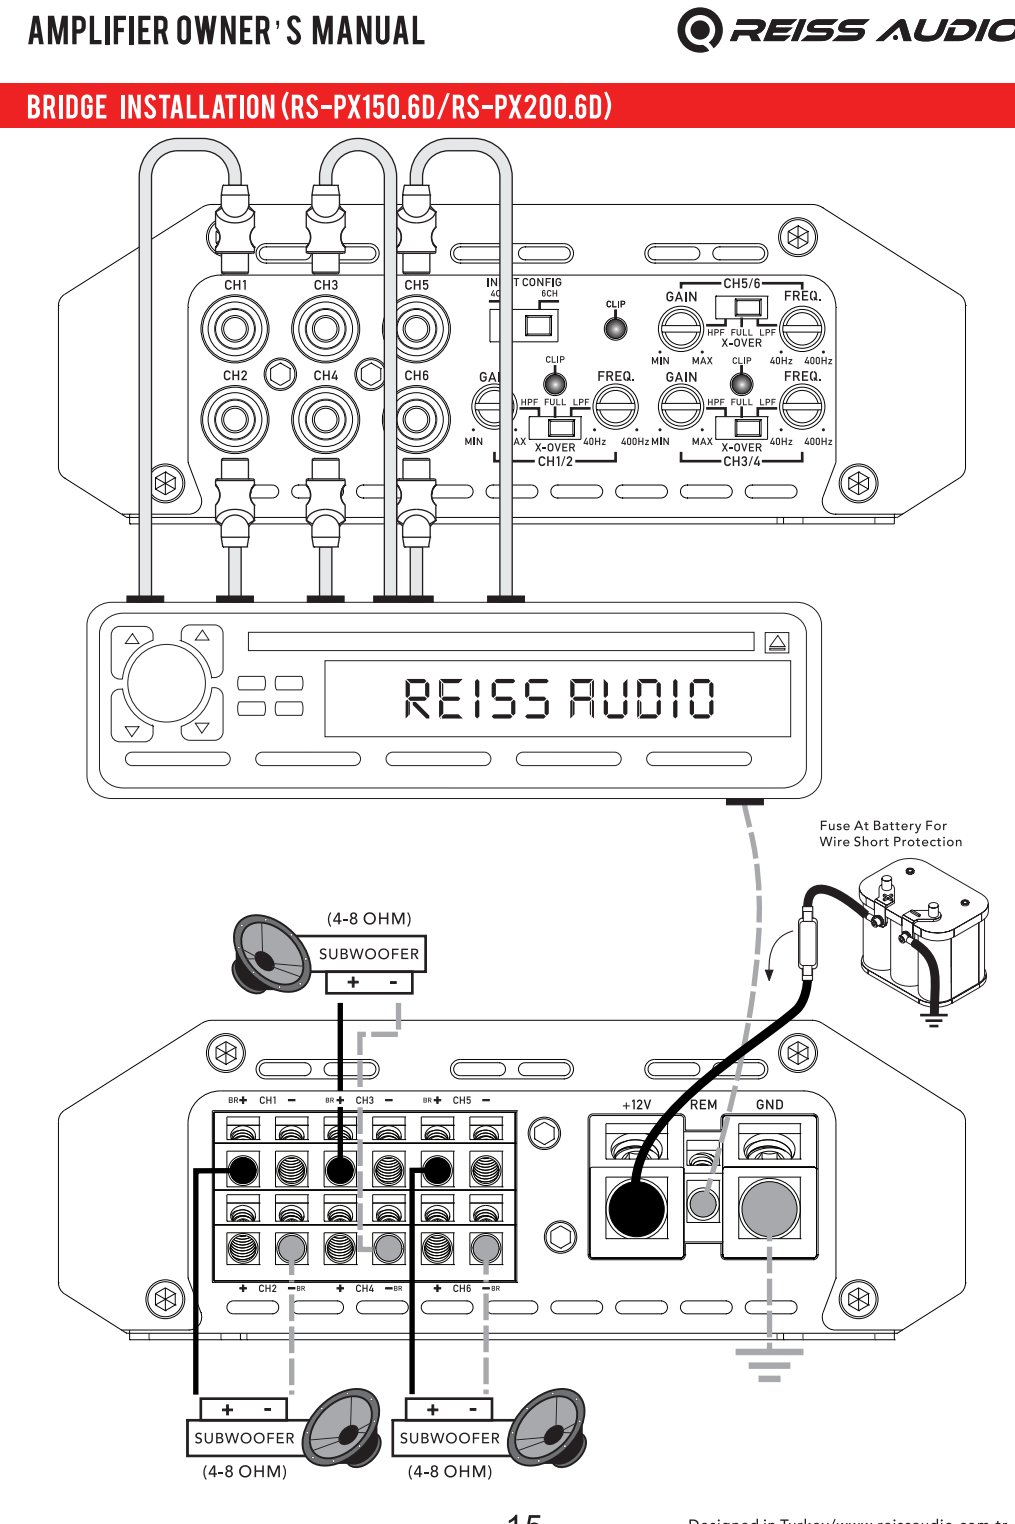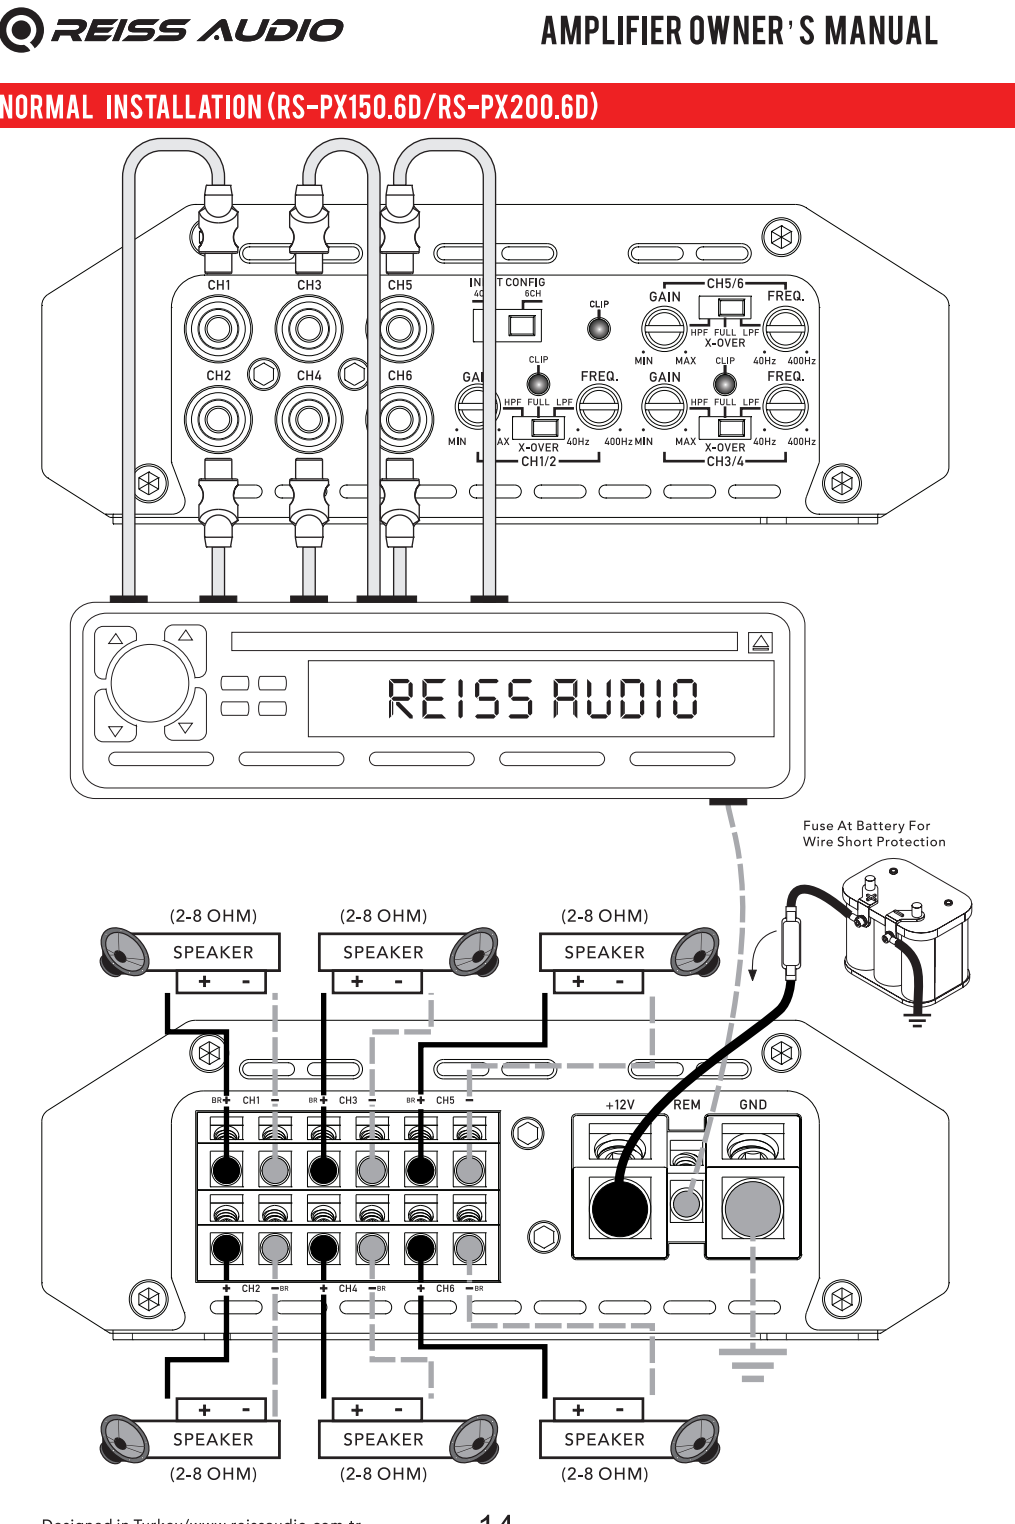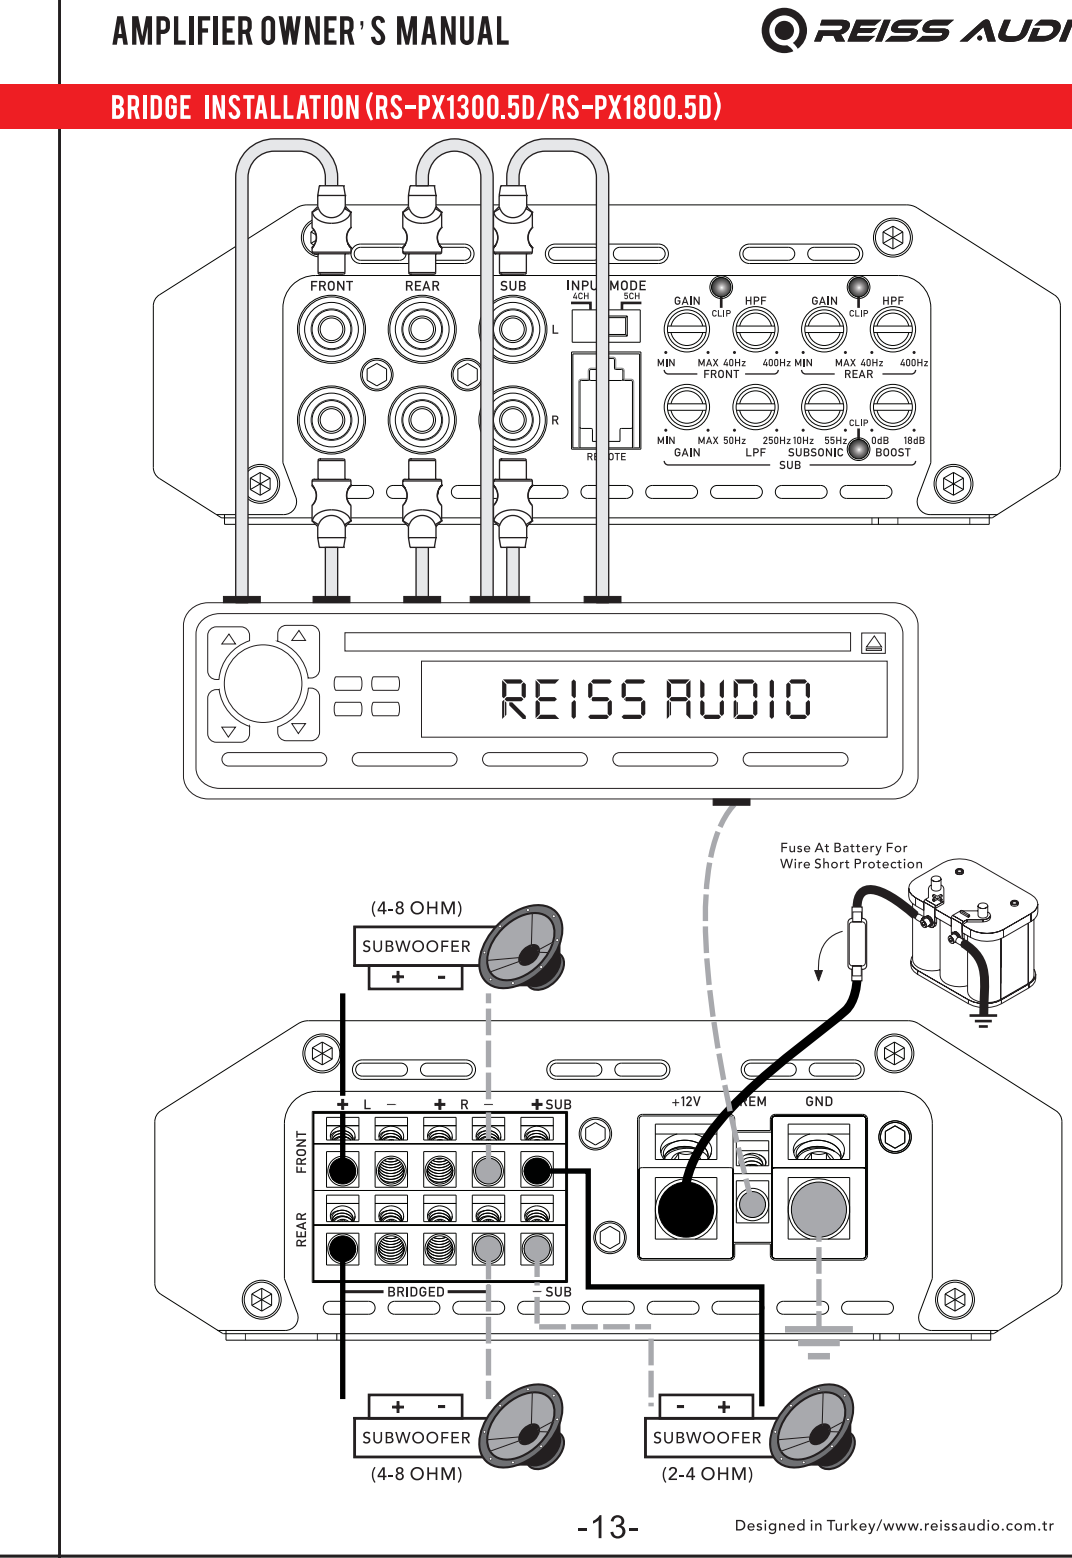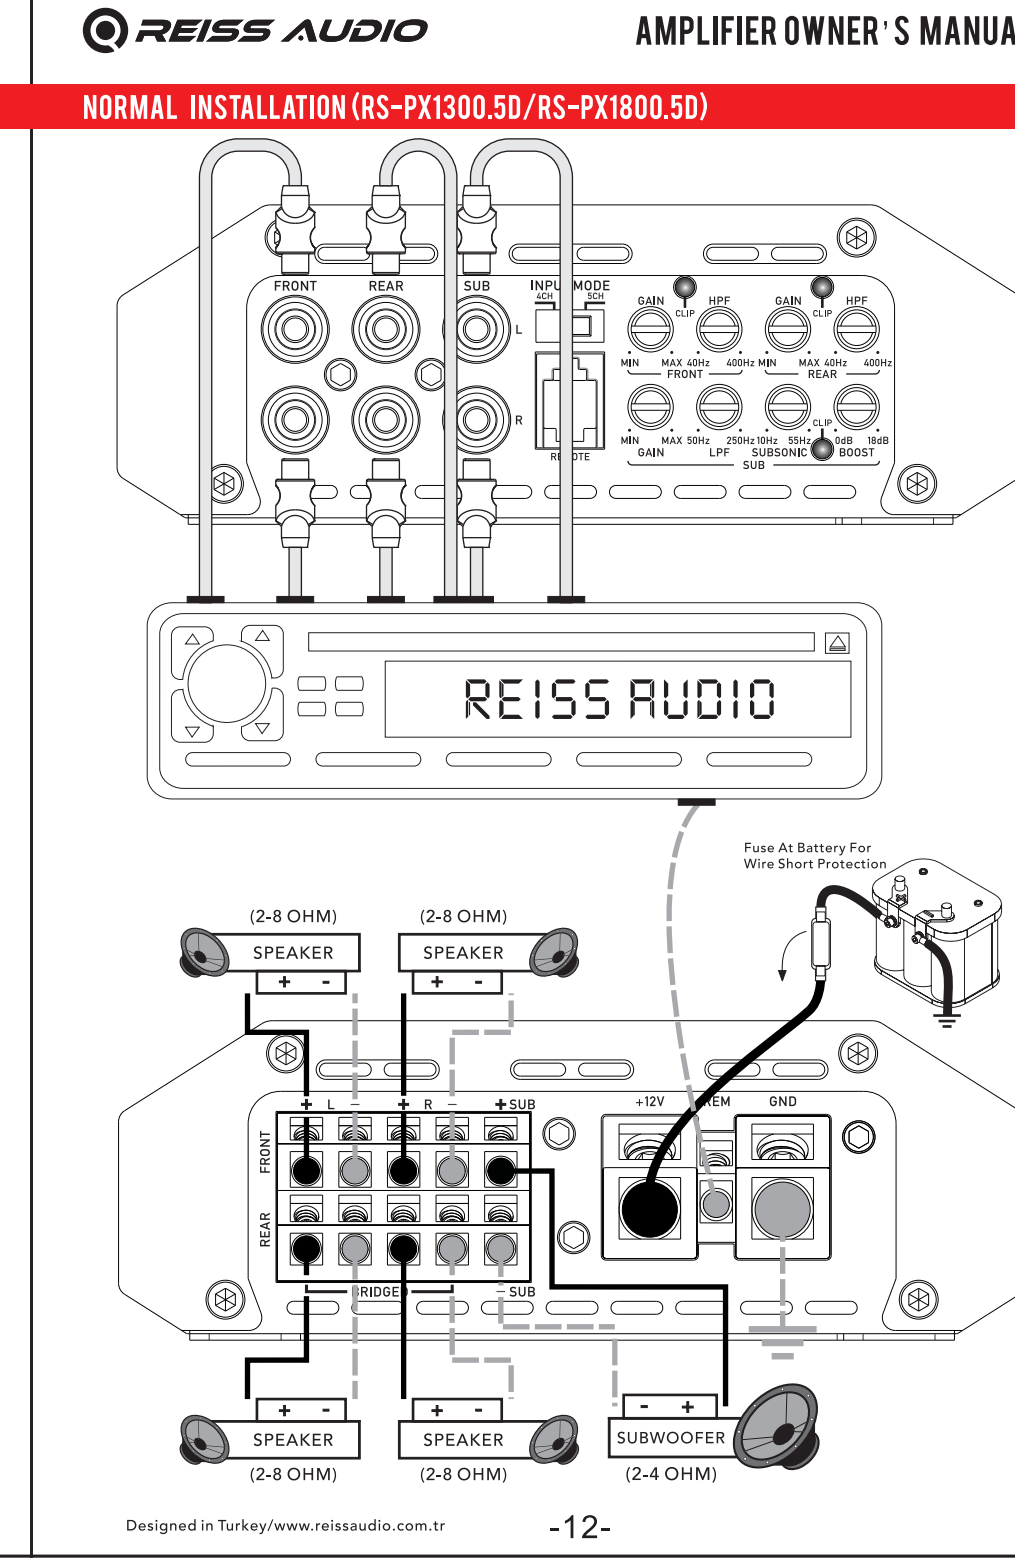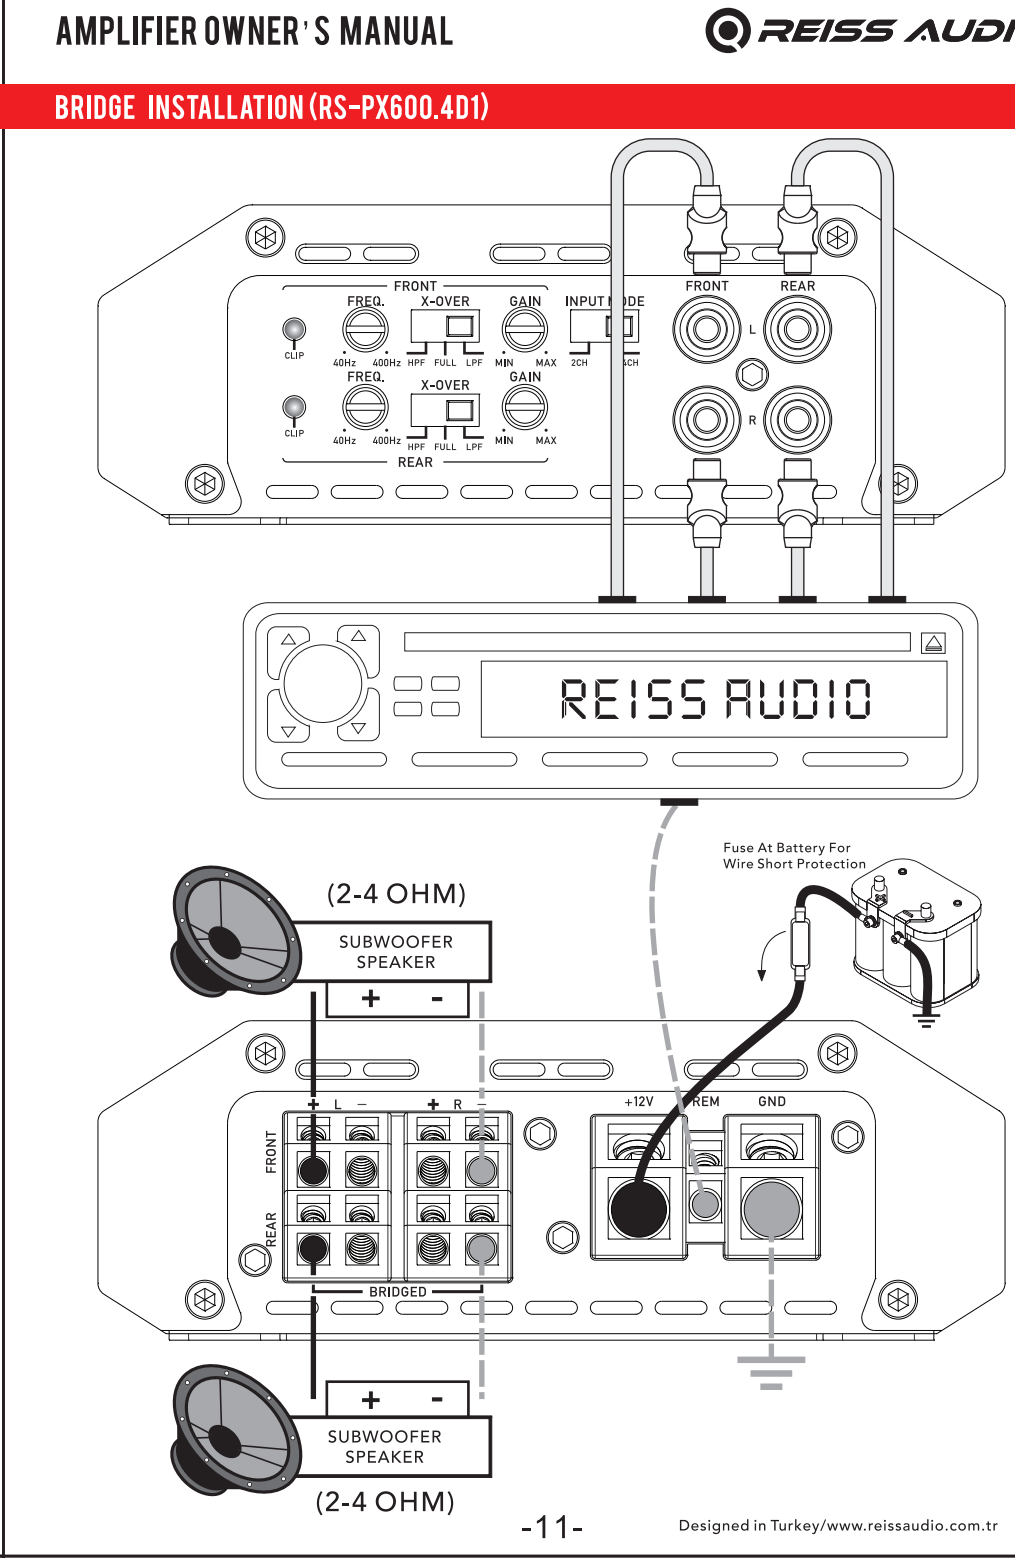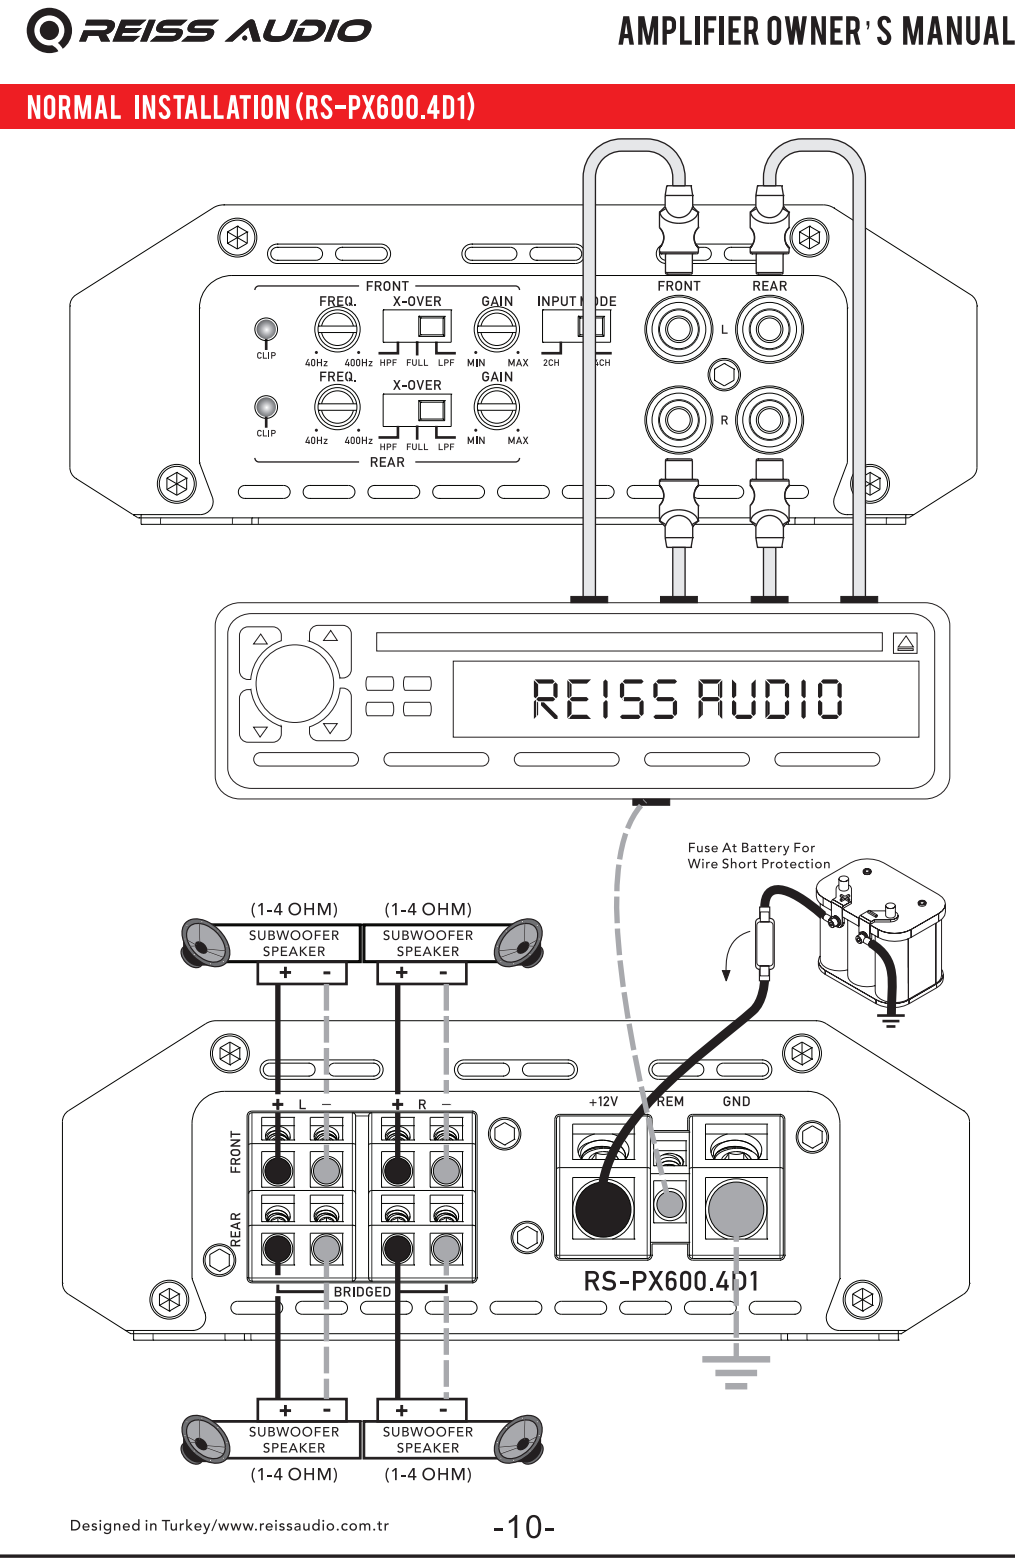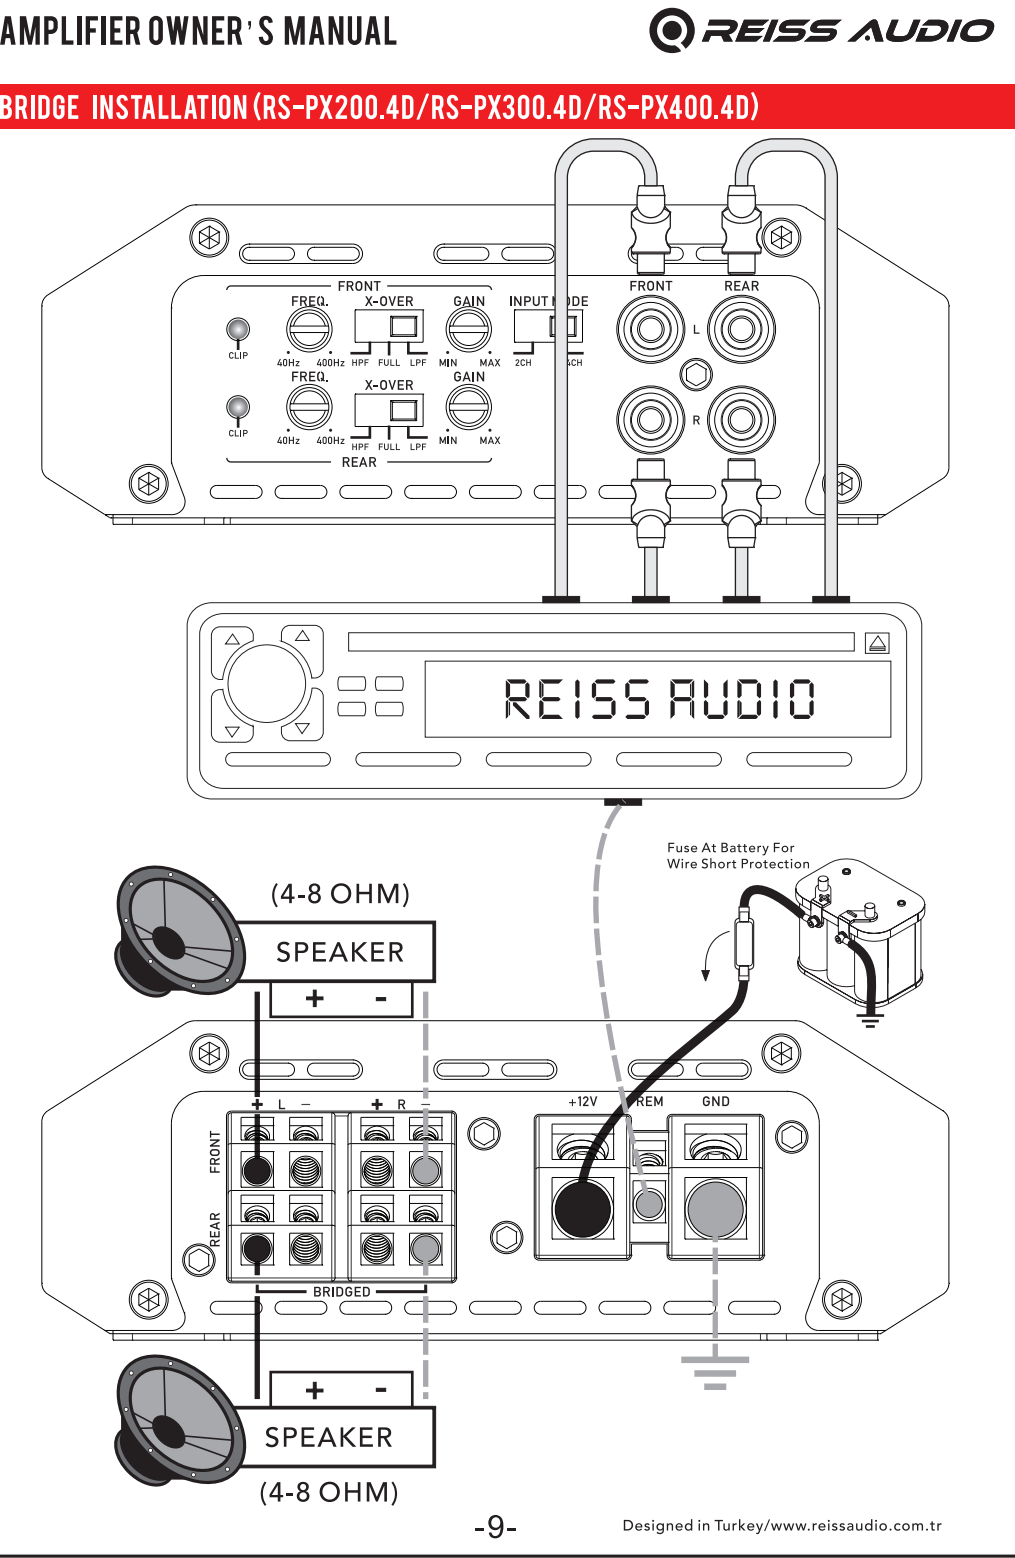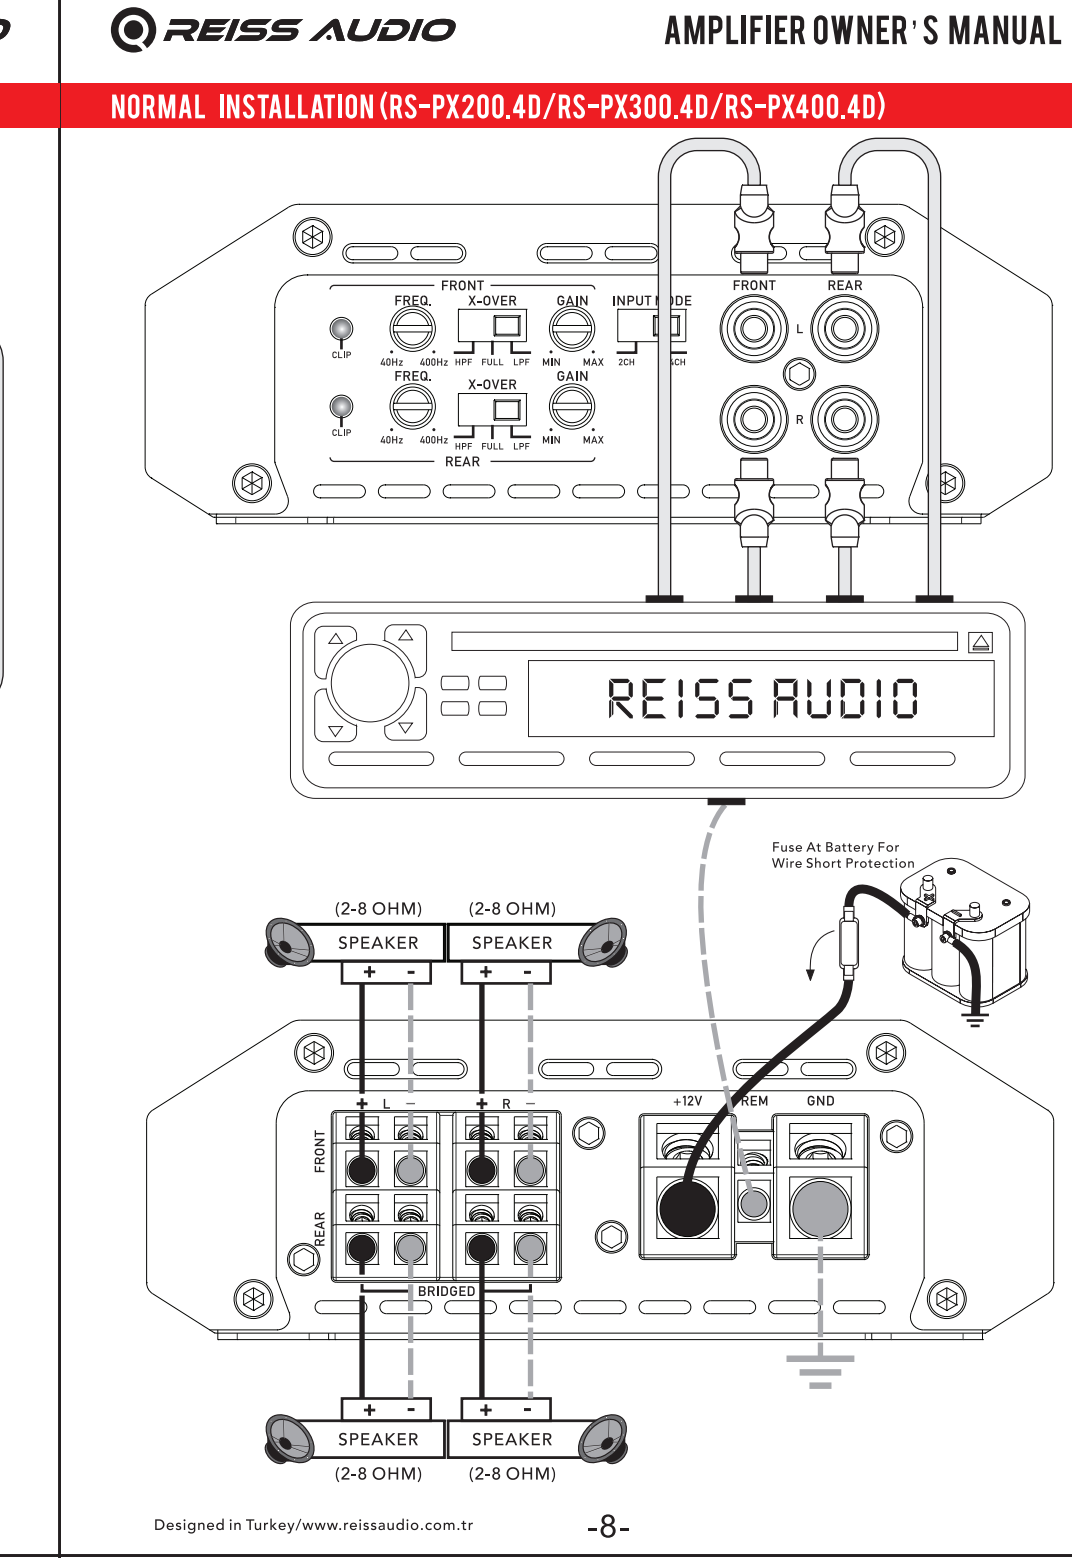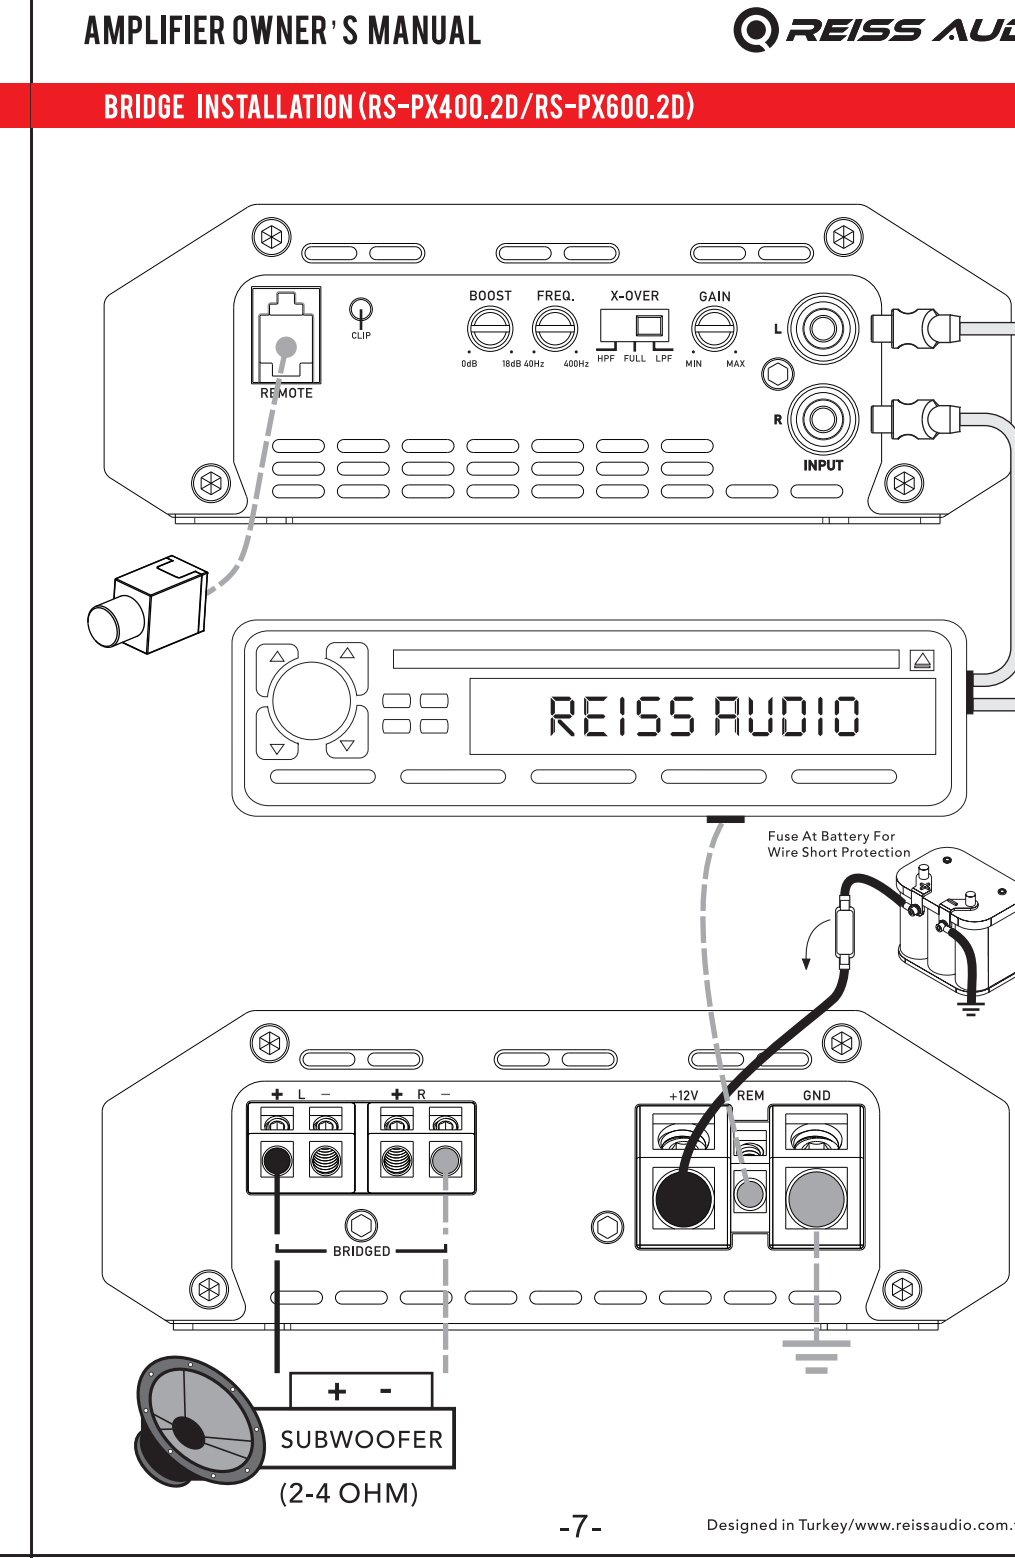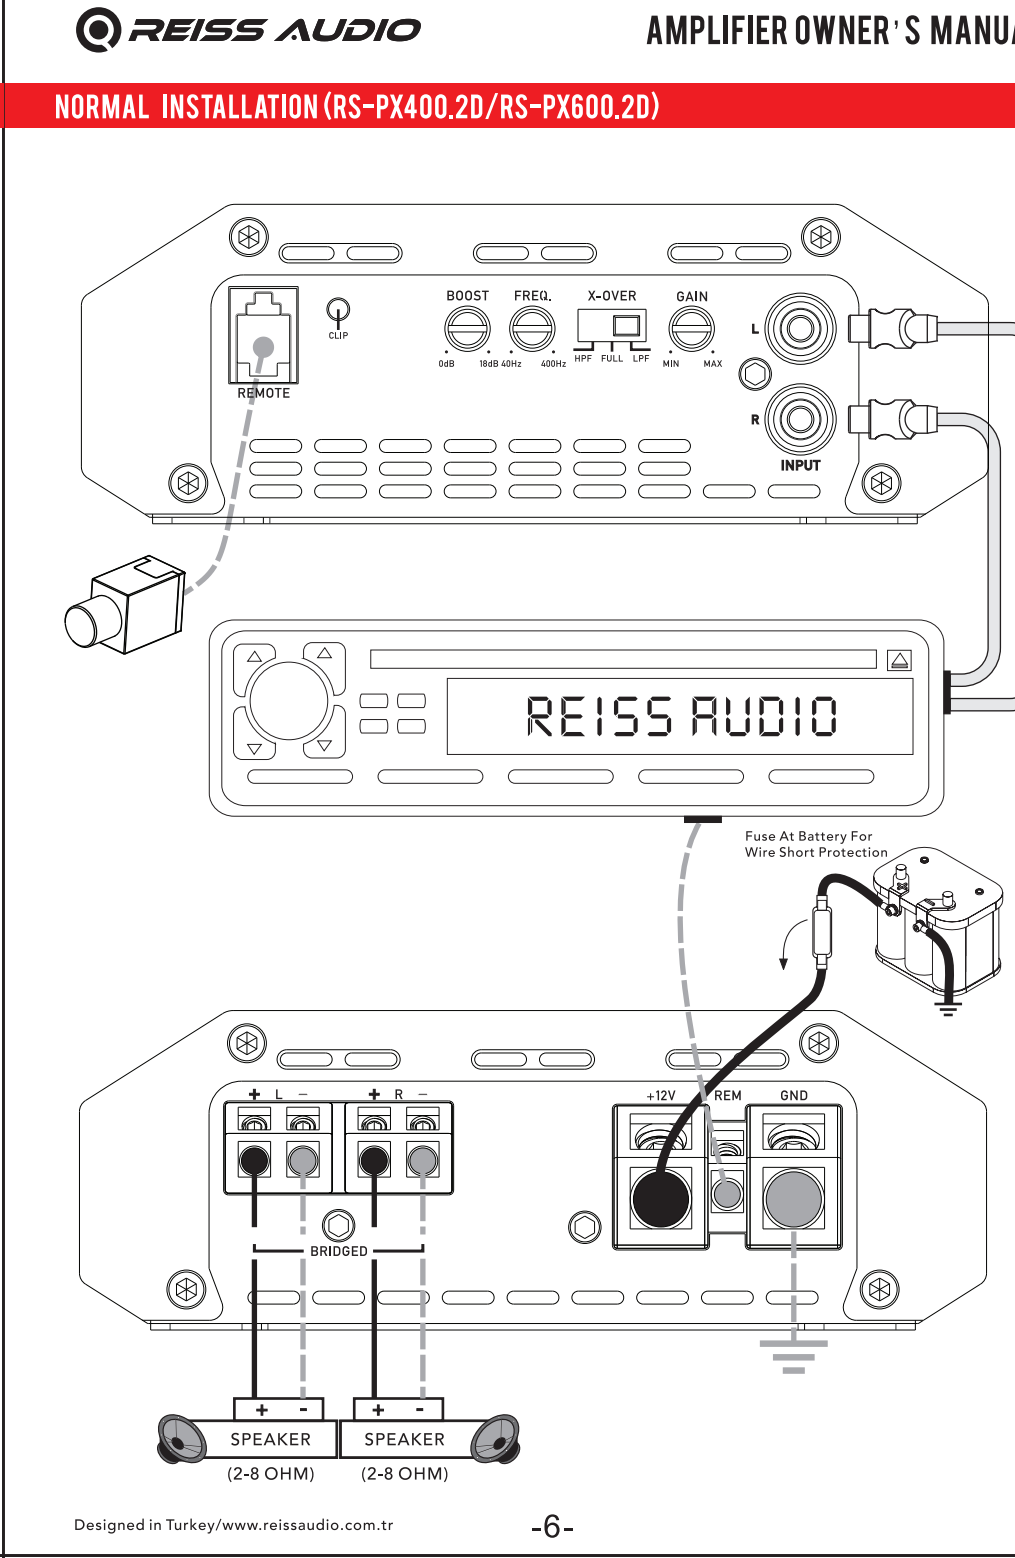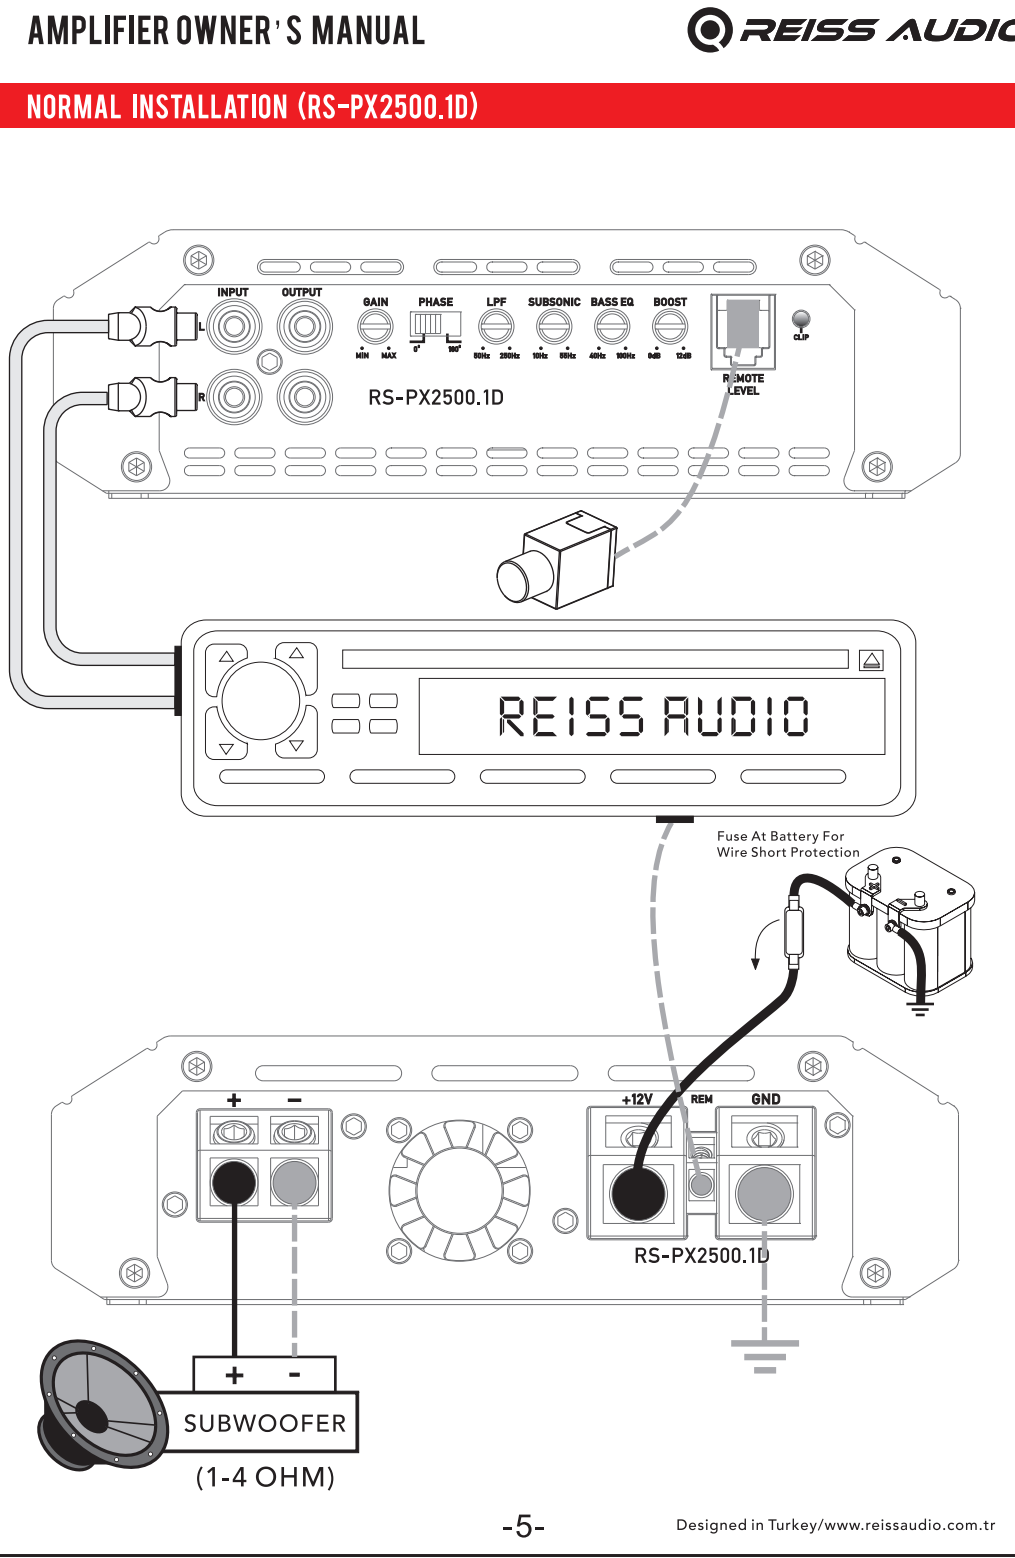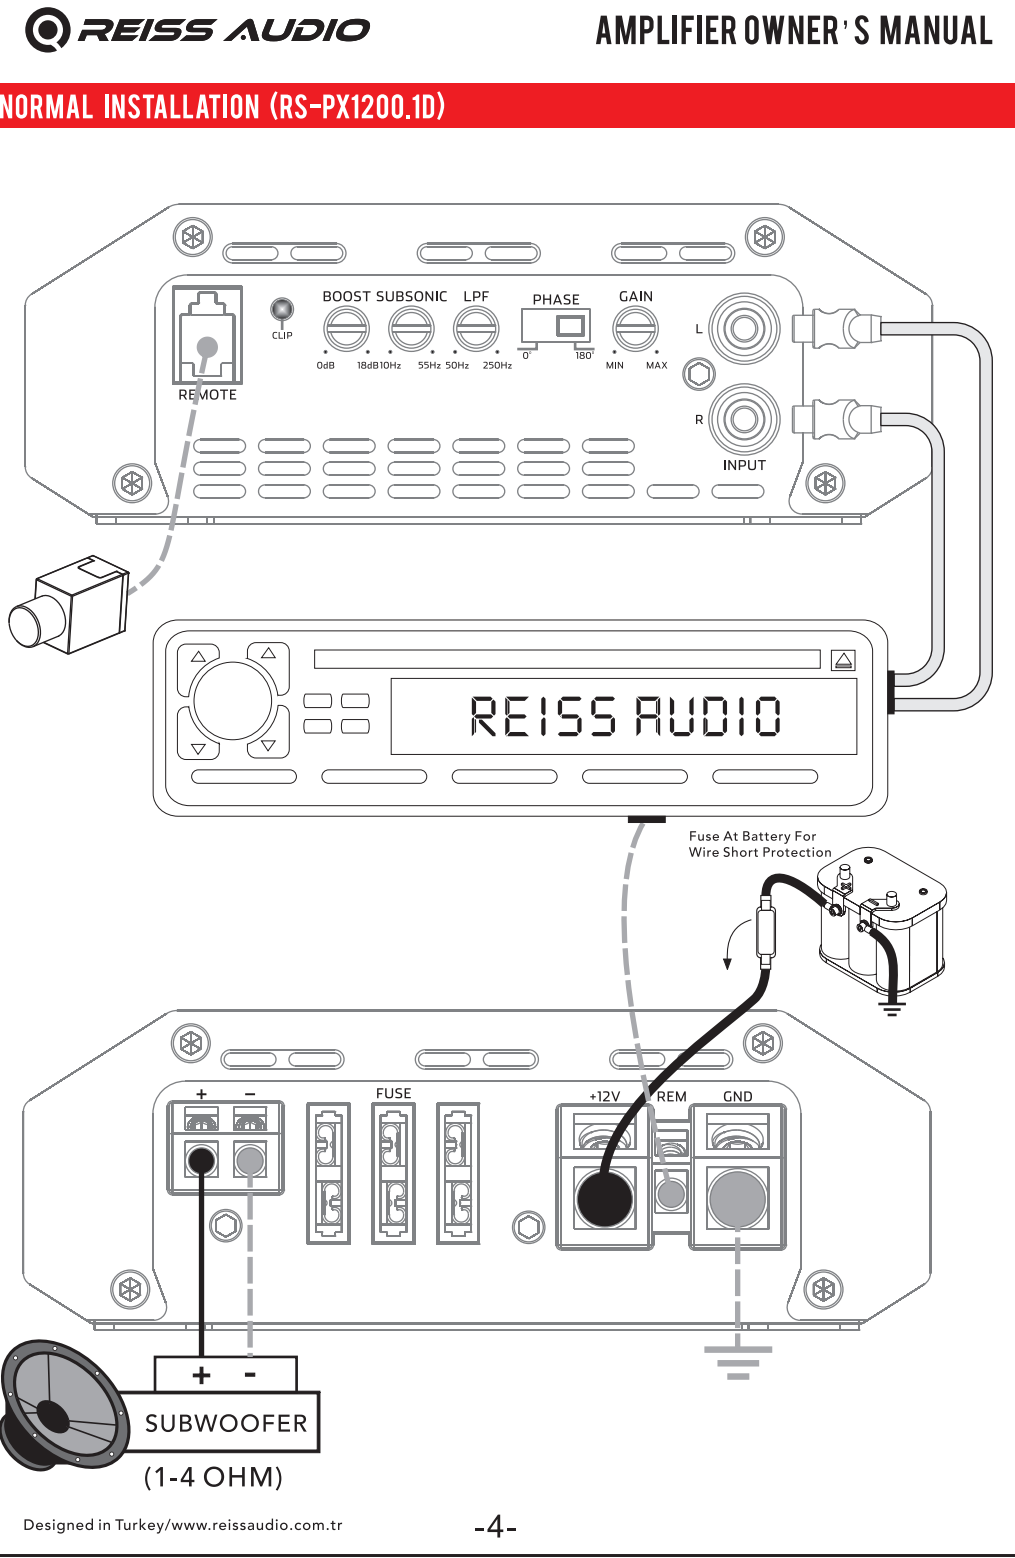

AMPLIFIER OWNER'S MANUAL

FEATURES

- Balanced Differential Inputs for Noise-Free Operation Regardless of the source
- IRS (International Rectifier) Full Range Capable Class-D Topology
- Mini Size footprint for easy installation of Many Applications
- Variable Full Crossover Filter: LPF, FULL, HPF, LPF for RS-PX1200.1D & RS-PX2500.1D of RS-PX1300.5D & 1800.5D
- High Level JRC4580 OPAMP pre-amp Circuit and Multi-Filtering to Ensure High Sound Quality Performance
- Surface Mount Component Technology
- Audio Precision Quality Control Verification
- Stable & Reliable Four Layers PCB Trace Layout
- Power & Protection & Clipping Led Lights Status Indicator
- 12dB Per Octave Slopes for Multi-Channel Models & 24dB Per Octave Slope for Mono Model (Or Mono Channel)
- Short circuit, thermal, DC offset, Overload and voltage protections
- Base Knob Controller (RS-PX1200.1D & 2500.1D & 400.2D & 600.2D & 1300.5D & 1800.5D)
- Working Status Led Illuminated Under Brand Logo

SPECIFICATIONS

MODEL NO.	RS-PX1200.1D	RS-PX2500.1D	RS-PX400.2D	RS-PX600.2D
Circuit Topology	Mono Block Class-D	Mono Block Class-D	Full Range Class-D	Full Range Class-D
RMS POWER OUTPUT AT 1 D	1200W	2500W	N/A	N/A
RMS POWER OUTPUT AT 2 D	800W	1800W	600Wx2CH	900Wx2CH
RMS POWER OUTPUT AT 4 D	500W	1200W	400Wx2CH	600Wx2CH
RMS POWER OUTPUT AT 4 D BRIDGED	N/A	N/A	1200Wx1CH	1800Wx1CH
TOTAL HARMONIC DISTORTION	<0.3%	<0.3%	<0.3%	<0.3%
SIN RATIO REF 1W AT 40	>90dB	>90dB	>90dB	>90dB
GAIN RANGE	0.2-10V	0.2-10V	0.2-10V	0.2-10V
PER OCTAVE SLOPES	24dB	24dB	12dB	12dB
OPAMP CHIPSET	JRC4580	JRC4580	JRC4580	JRC4580
CROSSOVER RANGE	50-250Hz	50-250Hz	40-400Hz	40-400Hz
OPERATION FREQUENCY RANGE	20-500Hz	20-500Hz	20-20KHz	20-20KHz
SUBSONIC	10-55Hz	10-55Hz	N/A	N/A
BASS BOOST	0-18dB	0-18dB	0-18dB	0-18dB
BASS KNOB	INCLUDED	INCLUDED	INCLUDED	INCLUDED
INPUT MODE	4CH/5CH	4CH/5CH	4CH/6CH	4CH/6CH
DIMENSIONS(MM)	228x140x49.3	308x190x53.3	228x140x49.3	288x140x49.3

AMPLIFIER OWNER'S MANUAL

MODEL NO.	RS-PX200.4D	RS-PX300.4D	RS-PX400.4D	RS-PX600.4D
Circuit Topology	Full Range Class-D	Full Range Class-D	Full Range Class-D	Full Range Class-D
RMS POWER OUTPUT AT 1 D	N/A	N/A	N/A	600Wx4CH
RMS POWER OUTPUT AT 2 D	300Wx4CH	450Wx4CH	600Wx4CH	400Wx4CH
RMS POWER OUTPUT AT 4 D	200Wx4CH	300Wx4CH	400Wx4CH	250Wx4CH
RMS POWER OUTPUT AT 2 D BRIDGED	N/A	N/A	N/A	1200Wx2CH
RMS POWER OUTPUT AT 4 D BRIDGED	600Wx2CH	900Wx2CH	1200Wx2CH	800Wx2CH
TOTAL HARMONIC DISTORTION	<0.3%	<0.3%	<0.3%	<0.3%
SIN RATIO REF 1W AT 40	>90dB	>90dB	>90dB	>90dB
GAIN RANGE	0.2-10V	0.2-10V	0.2-10V	0.2-10V
CROSSOVER RANGE	40-400Hz	40-400Hz	40-400Hz	40-400Hz
OPERATION FREQUENCY RANGE	20-20KHz	20-20KHz	20-20KHz	20-20KHz
PER OCTAVE SLOPES	12dB	12dB	12dB	12dB
INPUT MODE	2CH/4CH	2CH/4CH	2CH/4CH	2CH/4CH
OPAMP CHIPSET	JRC4580	JRC4580	JRC4580	JRC4580
DIMENSIONS(MM)	268x140x49.3	318x140x49.3	378x140x49.3	338x140x49.3

AMPLIFIER OWNER'S MANUAL

WARRANTY

Should your amplifier require service please consult with the dealer from which it was purchased or your nearest REISS AUDIO Local Dealer. Do not attempt to return your amplifier directly to us without first calling for a Return Authorization Number. Units received without an accompanying Return Authorization Number will be processed more slowly. Additionally, you must include a copy of your purchase receipt from an authorized dealer for consideration of in-warranty service, otherwise repair charges will apply. Units received without a receipt will be held for 30 days, allowing us time to contact you and obtain a copy of the receipt. After 30 days, all units will be returned.

REISS AUDIO

REISS and the REISS logo are registered trademarks of REISS ELECTRONICS INC. All other logos and trademarks are the property of their respective owners.

Copyright ©2020 Reiss Electronics Inc.